




Modular support system

Innovative conveying technology

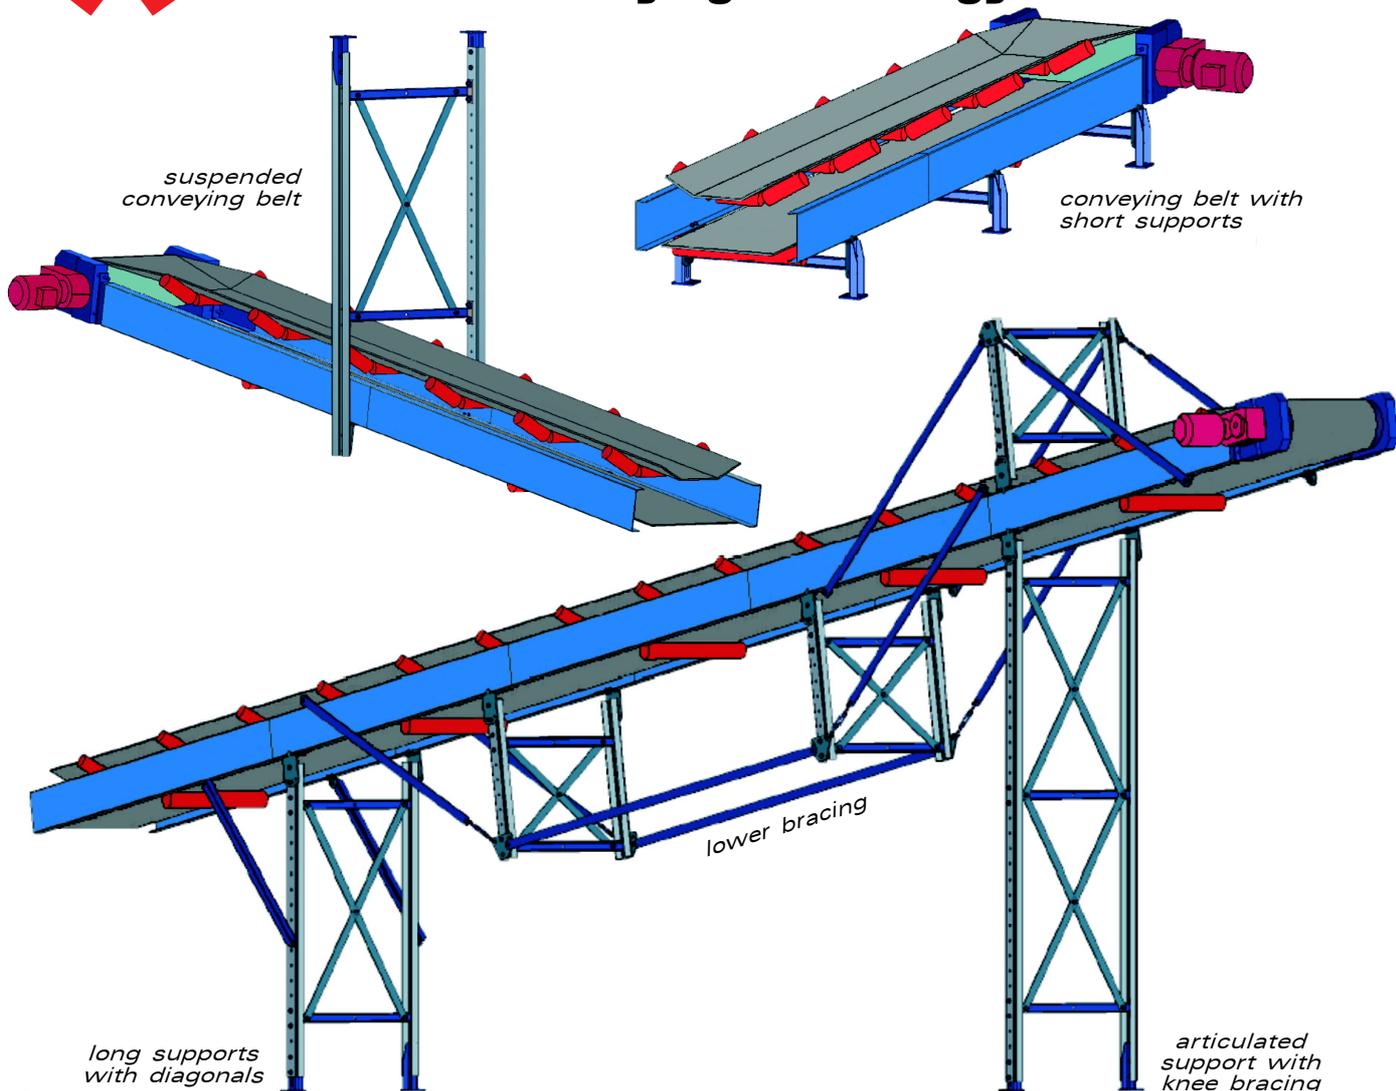


* Compatible to VHV systems
most demanding installations



VHV Examples of different installations

The distance between supports depends upon the frame selection. No supports are required for VHV belt conveyors that are suspended from roofs designed to handle an additional load. Multi-position supports and conveyor undercarriages are adjustable in height and angle and have bolted cross struts and diagonals. Steel supports are designed to meet the static and dynamic load requirements. V supports are able to be equipped with skids or undercarriages, adjustment of height, and swiveling devices. Hot-dipped galvanization helps guarantee long-term corrosion prevention.

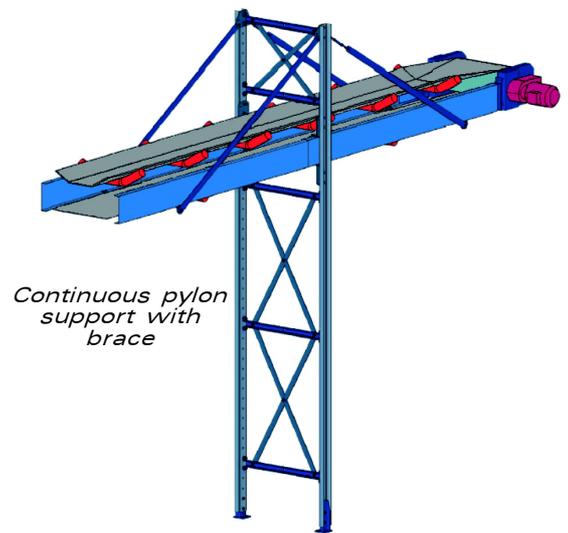

Continuous pylon support with brace



V- support with skids



swivelling undercarriage adjustable in height



large support radius with bracing



steel construction supports with pylon

